

## Nanto

COMPACT AND MODERN WATER HEATER  
DESIGNED TO FIT INTO SMALL SPACES

Models 10 to 30L (above sink)  
Models 10 to 15L (under sink)



### BENEFITS

- Above or under sink installation according to the model
- Visual guide on the product for simple installation
- Eco and Absence positions for more energy savings while extending the product's lifetime
- Long tank life thanks to O'Pro exclusive anti-corrosive protection



**O'Pro**  
TECHNOLOGY

### + EASY PROGRAMMING WITH INTUITIVE INTERFACE



## Nanto

Models 10 to 30L (above sink)  
Models 10 to 15L (under sink)


### + PROVEN QUALITY WITH O'PRO TECHNOLOGY



**O'Pro**  
TECHNOLOGY

#### EXCLUSIVE ANTI-CORROSIVE SYSTEM


O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This extends the life of the magnesium anode as well as increasing protection against corrosion.

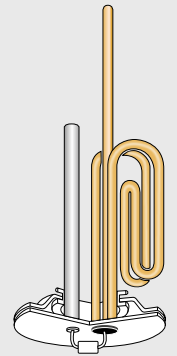

### + EASY INSTALLATION

#### Installation dimensions

Model	Inlet/outlet connections	Installation type	Dimensions (mm)						Flange opening (Ø) mm	Net weight (kg)
			A	B	C	D	E	F		
10	1/2"	Above sink	387	360	262	100	100	62	78	6.9
10	1/2"	Under sink	378	360	262	100	100	62	78	6.9
15	1/2"	Above sink	387	360	321	100	100	62	78	8.0
15	1/2"	Under sink	378	360	321	100	100	62	78	8.0
30	1/2"	Above sink	467	440	388	111	100	62	78	11.8

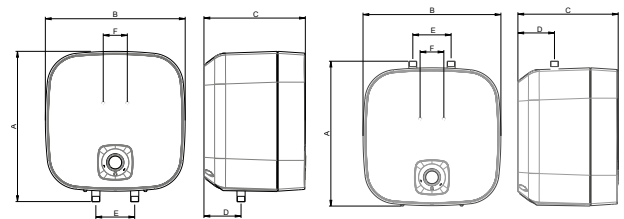

ABOVE SINK MODEL

UNDER SINK MODEL

#### Technical data

Model	Installation type	Output (W)	Voltage (V)	Heat-up time (Δt=50°C) (min)	Heat-up time (Δt=35°C) (min)	Energy consumption (kWh/24 h at 65°C)	ErP energy class	Profile
10	Above sink	2000	230 / 220-240'	18	12	0.48	<b>A</b>	XXS
10	Under sink	2000	230 / 220-240'	18	12	0.48	<b>B</b>	XXS
15	Above sink	2000	230 / 220-240'	27	18	0.58	<b>A</b>	XXS
15	Under sink	2000	230 / 220-240'	27	18	0.58	<b>B</b>	XXS
30	Above sink	2000	230 / 220-240'	53	37	0.84	<b>C</b>	S